



## How to install JU-Print on Ubuntu (18.04.1 LTS)

1. Download and unzip drivers for model Bizhub C458 from [www.konicaminolta.com](http://www.konicaminolta.com)
2. Open Settings – Printers and click on “Additional Printer Settings”.

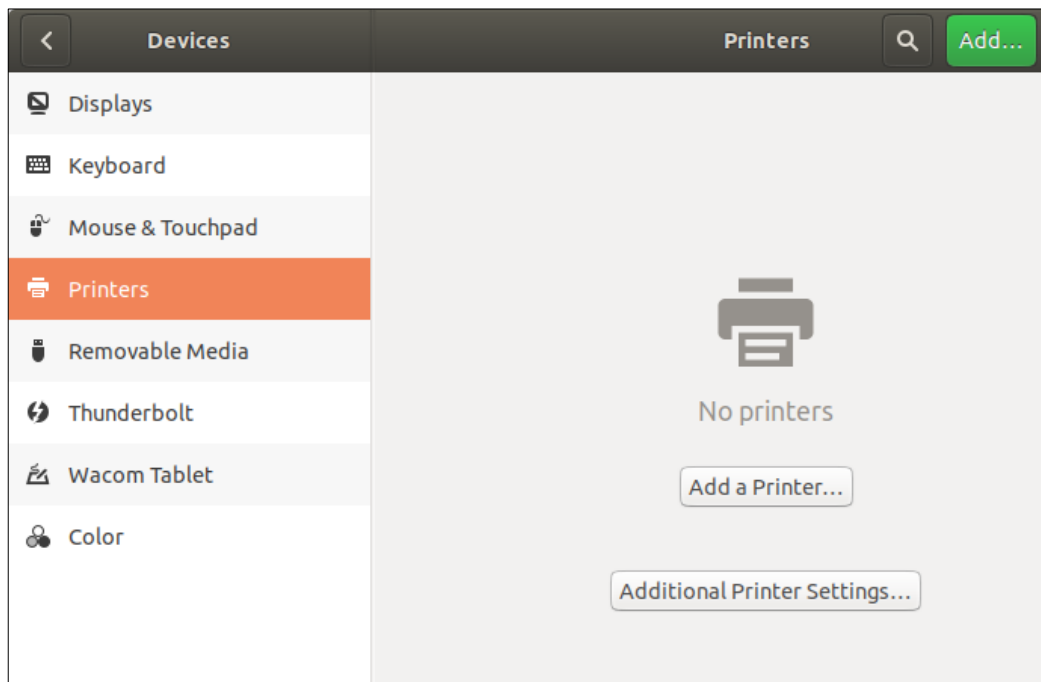


3. Click Add.

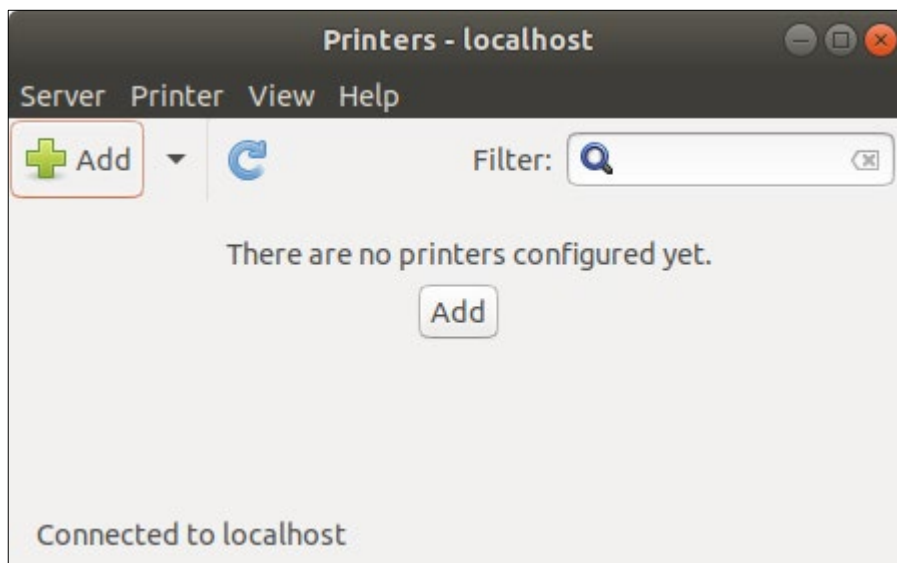

4. Enter the URI for the printer. Make sure you specify your JU account in the URI:


lpd:// [JUAccount]@ju-printq.ju.se/secure

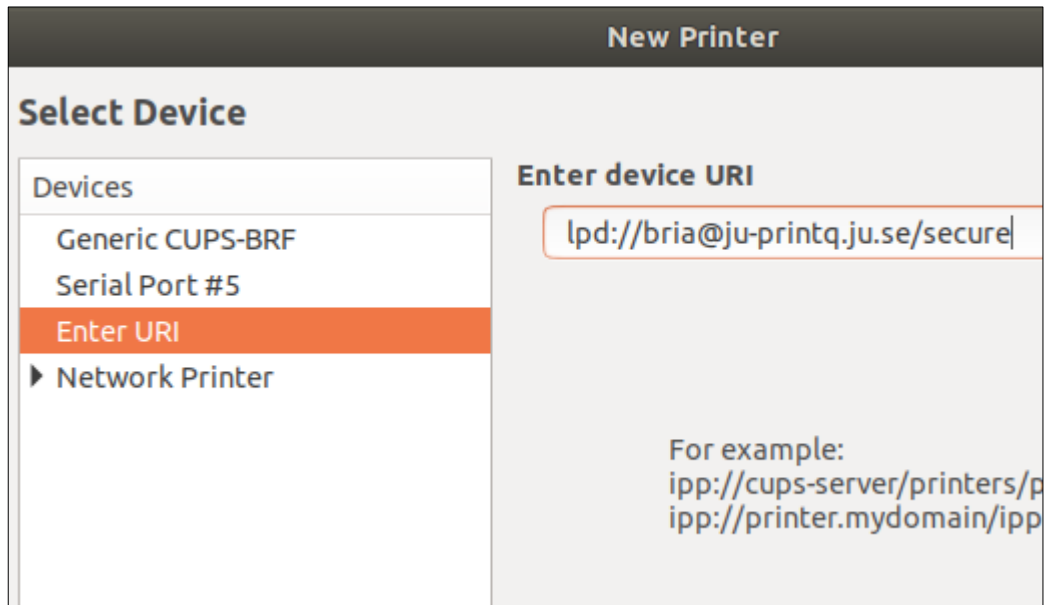

The screenshot shows the 'New Printer' dialog box with the 'Select Device' section active. On the left, a list of device types includes 'Generic CUPS-BRF', 'Serial Port #5', 'Enter URI' (highlighted in orange), and 'Network Printer'. On the right, the 'Enter device URI' field contains the text 'lpd://bria@ju-printq.ju.se/secure'. Below this field, there is an example of a URI: 'For example: ipp://cups-server/printers/p ipp://printer.mydomain/ipp'.

5. Select "Provide PPD file" and browse to the downloaded/unzipped PPD-file. Select the following file:

IT5PPDLinux\_1100010000MU/English/CUPS1.2/KOC759UX.ppd



The screenshot shows the 'New Printer' dialog box with the 'Choose Driver' section active. Three radio button options are visible: 'Select printer from database', 'Provide PPD file' (which is selected), and 'Search for a printer driver to download'. Below these options, there is explanatory text: 'PostScript Printer Description (PPD) files can often be found on the driver printer. For PostScript printers they are often part of the Windows® drive'. At the bottom, a file selection field shows 'KOC759UX.ppd' with a file icon to its right.

6. Make sure the installable options are selected like the picture below.

**New Printer**

### Installable Options

This driver supports additional hardware that may be installed in the printer.

Paper Source Unit: PC-415 ▼

Finisher: FS-533 ▼

Punch Unit: None ▼

Z-Fold Unit: None ▼

Post Inserter: None ▼

Saddle Kit: None ▼

Hard Disk: Installed ▼

Model: C458 ▼

7. Set "JU-Print" as the printer name.

**New Printer**

### Describe Printer

**Printer Name**  
Short name for this printer such as "laserjet"

JU-Print

**Description (optional)**  
Human-readable description such as "HP LaserJet with Duplexer"

|

**Location (optional)**  
Human-readable location such as "Lab 1"